


46" ENB 500 nit Professional Video Wall Panel

LTI460HN14

LTI460HN14 is a color active matrix liquid crystal display composed of a TFT LCD panel, a driver circuit, and a backlight unit. This premium 46" extreme narrow bezel panel provides professional-grade high-definition image quality, uniform brightness, and consistent color expression and accuracy. Deliver unsurpassed visual messages in the world's most commanding atmospheres – from control rooms to large public venues.

To find a distributor or request a sample please [Contact Us](#)

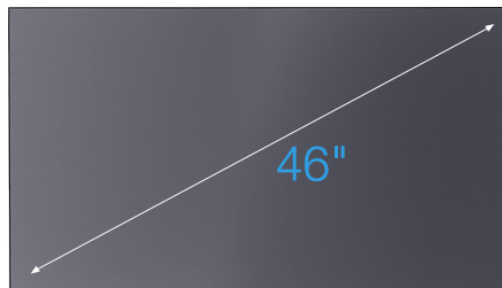

GloAx Solutions Display

World's narrowest bezel

Features an extreme narrow 1.7 mm bezel design, creating a stunning continuous viewing experience, allowing for an absolute focus on content.

Outstanding brightness and color uniformity

- Superior luminance uniformity ensures consistent color across all screens
- Industry leading contrast ratio (4,000:1) for crystal-clear picture quality and vibrant color expression
- Immense brightness of 500 nit provides vivid images in a range of lighting conditions

Unrivaled durability and reliability

- 24/7 operation and dependability with black mura prevention technology
- Proprietary anti-image sticking technology, allowing for distortion- and distraction-free viewing throughout the product's useful life

- Provides consistent display clarity and performance in any operational environment with a reinforced weather-resistant panel that deters heat, moisture and dust
- Specialized anti-glare polarization eliminates color changes that might occur due to external light and background reflection

Features:



Optical

- Full HD (1,920 x 1,080) resolution (16:9)
- Highest in industry contrast ratio (4,000:1)
- High aperture ratio and wide color gamut coverage (NTSC 72%)
- Wide viewing angle (178°)
- Anti-glare surface treatment (total haze: 25%, outer haze: 23%)
- Fast response time: gray-to-gray (G-to-G) 8 ms
- Luminance variation of maximum 15%
- Super Vertical Alignment (SVA) mode



Design

- Extreme narrow 1.7 mm bezel-to-bezel
- Landscape and portrait orientation compatible



Reliability

- High Tni (85°C) liquid crystal
- Black mura prevention technology
- Heat, moisture and dust resistant



Electrical

- Low power consumption
- LVDS (Low Voltage Differential Signaling) Interface (2 pixel/clock)
- Data Enable (DE) mode



Warranty

- 24/7 operation for 24 months



Certifications

- RoHS compliant (Pb-free)
- UL/CB

Specifications:

Panel Type	D-LED 46" ENB	Outline Dimensions (W/H/D)	1,020.02 X 574.61X 38.7 mm
Native Resolution	1,920 X 1,080 (FHD)	Aspect Ratio	16:9
Brightness	500 nit	Contrast Ratio	4,000:1
Bezel Width (L/R/U/D)	1.15/0.55/1.15/0.55 mm	Color Gamut	NTSC 72%
Viewing Angle	178°	Orientation	Landscape/Portrait



Response Time (G-to-G)

8 ms

Operation Time

24 hr
